


OSI 5000

with an output of 2,500 slpm or 4,840 kg per day the **OSI 5000** would be the ideal oxygen concentrator based on your unique needs

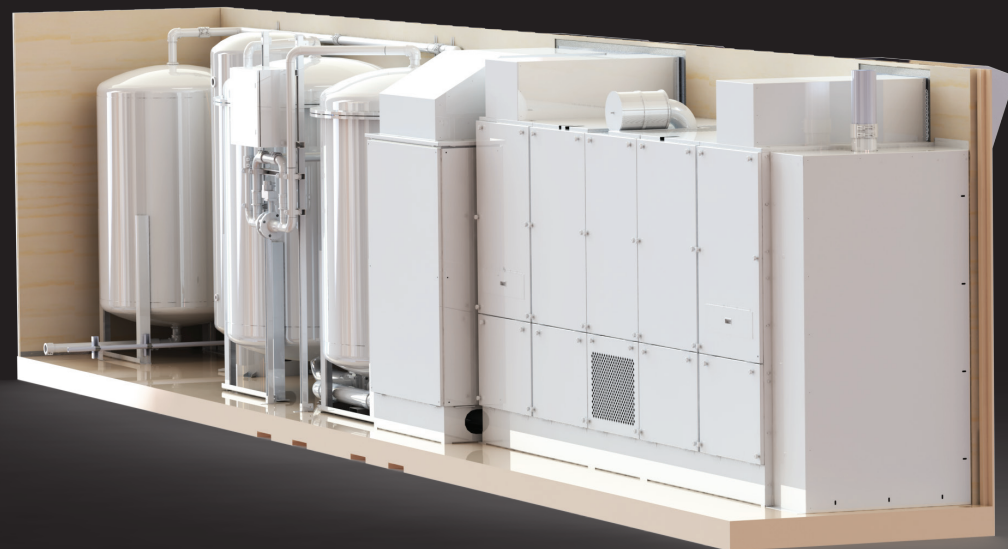

Our oxygen concentrators feature **Vacuum Swing Adsorption (VSA)** for maximum energy efficiency and productivity based on cost per kilogram of oxygen.

Benefits

- Save money on power consumption
- Plug and play installation
- Self-contained and moveable
- Extremely low maintenance
- Remote diagnostics and communications
- Automatic turn-down to suit demand

Specifications

Power Options	460 or 575 VAC/60 Hz 3Ph 380 VAC/50 Hz 3Ph
Discharge Pressure (w/Booster Compressor)	0.30-0.45 barg 1.40-6.5 barg
Operating Temperature	4-32 °C
Average Current Draw	93 A/460 VAC/60 Hz @ 4.0 barg
Average Power Consumption	68 kW @4.0 barg
Cost of Oxygen Generation	0.34 kW/kg O ₂ @ 4.0 barg
Dry Weight, Container	~15,000 kg
Oxygen Outlet	1" NPT